

## Universal Solar Module Mounting for Side-of-Pole – Multi-Module Adjustable

- High quality solar module mounts for industrial applications
- SunWize solar module mounts are weather resistant and provide strength and durability in extreme environments



### QUALITY and RELIABILITY

Universal slotted design fits a variety of module sizes  
Heavy duty aluminum provides strength and durability  
Stainless steel fasteners ensure long life  
Ideal for pole, wall or roof mounting

### FEATURES

Pole saddle brackets  
Adjustable tilt legs, from 25° to 60° from horizontal  
Adjustable pipe clamps  
Thread locking compound

### WARRANTY

1 -Year Limited Warranty of materials and workmanship

### CERTIFICATIONS

Wind Speed Rating: 90 – 110 mph, Exposure C per the 2010 California Building Code and ASCE 7-05

New Part No.	Old Part No.	Rail Length (inches)	Pipe Size (sch40)	Max. Module Area (sq.ft.)	Weight (lbs.)
007954	950037	26.5	2-4	10	9
007979	950082	26.5	4-6	10	11
007974	950076	26.5	8-10	10	11
007961	950056	35	2-4	10	9.5
007980	950083	35	4-6	10	9.5
007975	950077	35	8-10	10	9.5
007953	950036	53	2-4	20	12.5
007964	950063	53	4-6	20	14.5
007976	950078	53	8-10	20	14.5
007962	950058	60	4-6	30	18
007981	950084	60	8-10	30	18
007955	950045	76.5	4-6	35	20
007982	950085	76.5	8-10	35	20
007963	950061	80	4-6	35	22
007966	950068	80	8-10	35	22
007956	950046	96	4-6	40	24
007977	950079	96	8-10	40	24
007957	950047	104	4-6	45	26
007978	950080	104	8-10	45	26

## Universal Solar Module Mounting for Side-of-Pole – One Module Adjustable

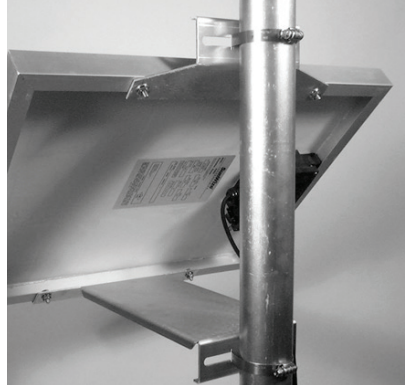


Photo at far left:  
Adjustable Mount Tilt angle from 15° to 90°

Photo left:  
Fixed Mount 45° tilt angle

- High quality solar module mounts for industrial applications
- SunWize solar module mounts are weather resistant and provide strength and durability in extreme environments

### QUALITY and RELIABILITY

Universal slotted design fits a variety of module sizes  
Heavy duty aluminum provides strength and durability  
Stainless steel fasteners ensure long life  
Ideal for pole, wall or roof mounting

### WARRANTY

1 -Year Limited Warranty of materials and workmanship

### FEATURES – Adjustable Mount

Adjustable frame clamping requires no mounting holes  
Pole saddle bracket with captive steel nuts  
Adjustable tilt arm, 15°-90°  
Pipe clamps adjustable from 2" to 4" OD poles

### FEATURES – Fixed Position Mount

Fixed 45° tilt facilitates installation  
2" U bolt included with 008064  
Pipe clamps adjustable from 2" to 4" OD poles included with 008095  
13" bracket with slots for band clamps for larger poles

New Part No.	Old Part No.	Rail Length (inches)	Pipe Size (sch40)	Max. Module Area (sq.ft.)	Weight (lbs.)
<b>Adjustable</b>					
007983	950086	13	2-4	2.5	2.3
007984	950087	18	2-4	4.5	3.0
007985	950088	26	2-4	5.5	4.1
<b>Adjustable for SunWize SolCharger Modules</b>					
007986	950089	18	2-4	SC12: 1.1	3.5
007987	950090	18	2-4	SC18: 1.5	3.5
007988	950091	18	2-4	SC24: 2.0	3.5
<b>Fixed</b>					
008064	950SW5/10MTASSY	13	2-4	1.1	2.0
008095	950UNILRGOEM-A	n/a	2-4	4.6	1.25